



RECHARGEABLE
**TRIPOD
SITE LIGHT**
13885

EN
Version 1
June 2023

This document is part of the product; retain it for the life of the product, passing it on to subsequent holders. Read this manual in full before attempting to assemble, operate, or maintain this product. Always use the latest version of the product manual, available from drapertools.com/manuals

1. Specification

Stock No.:	13885
Part No.:	RC/TSL/50W
Bulb wattage:	50W
Lumens:	5,000lm
Beam angle:	120°
Beam distance:	
At 10%:	25m
At 30%:	50m
At 100%:	90m
Colour temperature:	4,000~7,000K
Charging time:	3.5h
Run time:	
At 10%:	5h
At 30%:	2.5h
At 100%:	1h
Battery:	2 x 21700 7.4V, 4,000mA
Charger:	
Rated voltage:	100–240V AC
Rated frequency:	50/60Hz
Rated output:	8.4V DC / 3A
Charging current:	1.5A
Ingress protection:	IPX4
Dimensions:	
Folded:	W 12 x H 89 x D 12cm
Max.:	W 67 x H 230 x 67cm
Weight:	4.5kg

2. Health and Safety Information

Important: Read all Health and Safety instructions before attempting to operate, maintain or repair this product. Non-compliance with these instructions may result in injury or damage to the user or the product. Draper Tools accepts no responsibility for improper use of this device.

- Inspect the product and electrical connections for signs of damage or battery leakage before every use.
 - **DO NOT** use the product if defects are present and withdraw it from service until it has been repaired.
 - If the external power cable is damaged, it must be replaced by suitably qualified personnel or returned to Draper Tools for repair.
- **DO NOT** modify this product in any way.
- Remove all packaging and wrapping before use.
- Position the product appropriately.
 - Use only on level surfaces.
 - Ensure that the product is stable and unlikely to tip over.
 - Where necessary, apply weights to the stand or secure it.
- Ensure that all joints are securely fastened when the product is in use or stored.
- This is a Class III appliance and should only be used with the charging equipment supplied.



WARNING! This product may become hot when in use.

- **NEVER** place objects on the lamp area or hang objects on any part of this product.
- **NEVER** use the light near flammable or combustible substances or equipment.


2. Health and Safety Information (continued)

- **ALWAYS** disconnect the power supply and allow at least ten minutes for the product to cool before attempting any maintenance or adjustment.

 **WARNING! DO NOT stare at the operating light source.**

 **CAUTION! DO NOT leave the light panels switched on when they are closed.**

- **ALWAYS** ensure that the light is switched off during charging.
- Keep trailing cables tidy and secured to avoid trip hazards.
- This product is certified for use in ambient temperatures of 0–40°C.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- Replace any cracked protective shield.



3. Maintenance and Storage


Important: Maintenance and repair, including replacement of the light source, must only be performed by qualified personnel with sufficient knowledge of the electrical circuits used in this device.

- Charge the product for at least eight hours before first use.
- Always disconnect the power supply and allow the lamp to cool before cleaning.
- Clean the lamp using a dry cloth **ONLY**.

 **CAUTION! Do not immerse this product in water.**

- Store the product in a clean and dry environment, out of reach of children, with all joints firmly secured.
- Charge the light fully before storing and at least every three months between uses to maintain the battery life.

If the light does not illuminate when switched on, check the charge level. Ensure that charge is retained when disconnected from mains power.

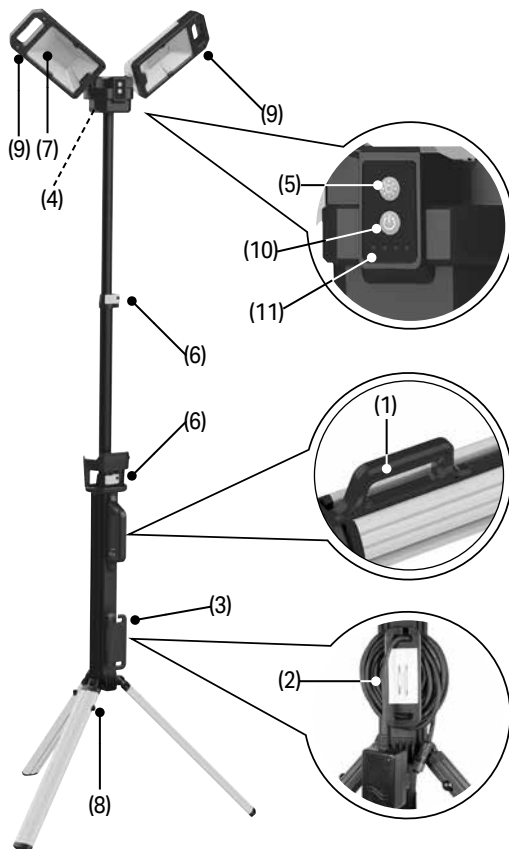

4. What's in the Box?

Carefully remove the product from the packaging and examine it for any signs of damage that may have occurred during shipment.

- (A). Folding light unit
- (B). Charger

5. Identification

- (1). Carry handle
- (2). Charging cable
- (3). Charging cable tidy
- (4). Charging port
- (5). Colour temperature button
- (6). Column extension latches
- (7). LED light panels
- (8). Leg release buttons
- (9). Magnets
- (10). Power button
- (11). Battery level indicators

6. Operation



Fig. 1

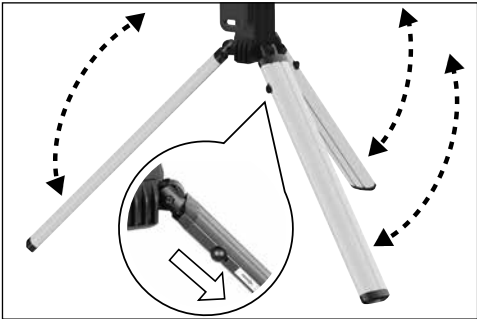


Fig. 2

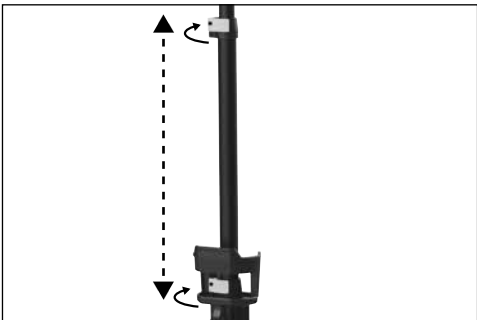


Fig. 3



Fig. 4

7. Colour Temperature

Press the colour temperature button (5) to switch between the following colour temperature settings:

- 4,000K (warm light)
- 7,000K (white light)

8. Bulb Brightness

Press power button (10) to cycle through the bulb brightness settings:

- 10% brightness
- 30% brightness
- 100% brightness
- Off

9. Battery Level Indicators and Charging

The light's charge level is displayed by the battery level indicators (11) while the light is switched on.

To charge, switch off the light and connect the supplied charger cable to the charging port (4) and an appropriate outlet. The blue collar locks the connector in place; twist to unlock. Keep the trailing cable tidy to avoid a trip hazard.

CAUTION! DO NOT charge the light while it is switched on.

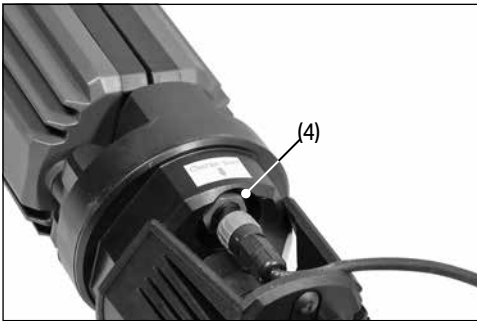


Fig. 5

10. Disposal

At the end of its working life, dispose of the product responsibly and in line with local regulations. Recycle where possible.

DO NOT dispose of this product with domestic waste; most local authorities provide appropriate recycling facilities.



11. Symbols



Read the instruction manual



Warning!



LED light source



Wattage



Brightness (per mode)



Replace cracked protective shield



Colour temperature (cool)



Colour temperature (warm)



Beam angle



Beam distance



Run time length from battery charge



Water ingress protection rating



Class III appliance; use only with the charging adaptor supplied



Min/Max extension lengths



WEEE –
Waste Electrical & Electronic Equipment
Do not dispose of Waste Electrical & Electronic Equipment in with domestic rubbish



Product weight (net)



European conformity



UK Conformity Assessed