

RECHARGEABLE

DEF/ADBLUE PUMP

07039

Version 1: December 2024

First release

Read this manual in full before using this product and retain it for future use. Always use the latest version of the manual. Please visit drapertools.com/manuals for the latest version.

1. Intended Use

This rechargeable battery-operated pump is designed for quick and easy transfer of a wide range of fluids. The pump will fit 20 Litre Drums. For use with Diesel, Kerosene, Diesel Exhaust Fluid (DEF/ Adblue), Antifreeze, Windshield Fluid, Mild Detergents & Agricultural Chemicals.

Any other application beyond the conditions established for use will be considered misuse. Draper Tools accepts no responsibility for improper use of this product.

2. Specification

Stock No.:	07039
Part No.:	RD/AP
Drum size:	20litres
Flow Rate:	11.5 L/min
Dispense Rate (Fully charged battery) :	300 litres (tested with water)
Flexible Hose Length:	1.5m
Telescopic Suction Tube Length:	380 – 520mm
Built in Battery:	Rechargeable 2900mAh Lithium-ion
Charging Time:	approx. 3 hours
Operating Temperature:	5 - 40°C
Operating Cycle:	maximum 15min (30min off)
Recommend Use:	Diesel, kerosene, light oils, diesel exhaust fuel, water, antifreeze, mild detergents and agricultural chemicals.

3. Health and Safety Information

Important: Read all the Health and Safety instructions before attempting to operate, maintain or repair this product. Failure to follow these instructions may result in injury or damage to the user or the product.



- **DO NOT** run the pump dry.
- **DO NOT** use with acids, acetone, benzene, cresol, concentrated caustic soda, liquid thinner or other solvents.
- **DO NOT** use with deteriorated or contaminated liquids or fuels.
- **DO NOT** use the pump for hot liquids above 40°C.
- **DO NOT** operate the pump for longer than 15 minutes without a 30-minute rest.
- **DO NOT** turn the pump upside down after use.
- **ALWAYS** ensure the pump is turned '**OFF**' and liquid has been drained from the pump before cleaning.
- **DO NOT** use abrasives or solvents to clean the pump.
- **ALWAYS** wear suitable protective clothing and eye protection.
- Wear suitable protective impermeable gloves to avoid repeated and prolonged contact of fluids with the skin.
- Keep the work area clean and dry. **DO NOT** use in damp or wet areas.
- **DO NOT** modify the pump and **DO NOT** use for a purpose it was not intended.
- Before using the pump check for damaged parts and that it operates correctly. Replace any damage parts immediately.
- Keep the pump away from heat and sharp edges. Before each use check the pump for wear and ensure all connections are secure.
- Store the pump in a dry location when not in use to prevent rusting.

Draper Tools

Draper Tools Limited

Hursley Road, Chandler's Ford

Eastleigh, Hampshire, SO53 1YF UK

Website: drapertools.com

Email: sales@drapertools.com

Product Helpline: +44 (0) 23 8049 4344

Telephone Sales Desk: +44 (0) 23 8049 4333

General Enquiries: +44 (0) 23 8026 6355

Delta International

Delta International BV

Oude Graaf 8


6002 NL

Weert

Netherlands

4. Identification

Carefully remove the product from the packaging and examine it for any signs of damage that may have occurred during shipment. If any part is damaged or missing, do not attempt to use the product. Please contact the Draper Helpline; contact details can be found at the back of this manual.

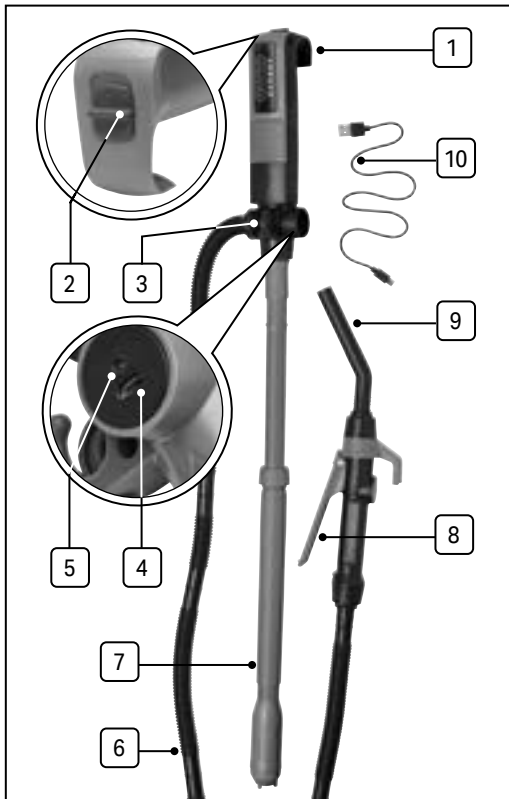

- | | |
|-----------------------|--------------------------------|
| 1. Storage hook | 7. Telescopic suction tube |
| 2. ON/OFF switch | 8. Flow control nozzle trigger |
| 3. Nozzle holder | 9. Nozzle |
| 4. USB charging port | 10. USB charging cable |
| 5. USB charging light | |
| 6. Flexible hose | |

Please visit drapertools.com for our full range of accessories and consumables.

5. Charging the pump

Important: Before operating this product fully charge using the USB cable supplied.

Plug into the charging port **4** and the green light **5** will flash while charging.

Once charged the light will remain solid.

6. Preparing the Pump

1. Adjust the length of the suction tube **7** depending on the size the container/drum the fluid is being pumped from. Turn the adjuster to release the two section and tighten once length adjusted.
2. Place the nozzle **9** into the container that the fluid is being transferred into.

7. Operation the Pump

1. Slide the switch **2** to the "ON" position.
2. Press the nozzle trigger **8** to start dispensing the fluid.
3. Release the trigger once dispensing complete and slide the switch to the "OFF" position.
 - A buzzer will sound during operation when the battery level is low and needs recharging.

8. Maintenance, Storage and Disposal

- **ALWAYS** ensure the pump is turned "OFF" and liquid has been drained before cleaning or carrying out any maintenance.
- **DO NOT** use abrasives or solvents to clean the pump.
- Clean the suction tube and nozzle after each use.
- At the end of its working life, dispose of the product responsibly and in line with local regulations. Recycle where possible.
- **DO NOT** dispose of this product with domestic waste; most local authorities provide appropriate recycling facilities.



- **DO NOT** burn or mutilate batteries; this may release toxic or corrosive substances.



9. Warranty

12 months from date of purchase –
Visit drapertools.com/warranty for full details.

10. Symbols



Read the instruction manual



WEEE – Waste Electrical & Electronic Equipment

Do not dispose of Waste Electrical & Electronic Equipment in with domestic rubbish



European conformity



UK Conformity Assessed



Warning!



Do not incinerate or throw onto fire



Wear suitable eye protection



Wear suitable personal protective equipment (PPE)