




## 6. TECHNICAL DESCRIPTION

### 6.1 IDENTIFICATION

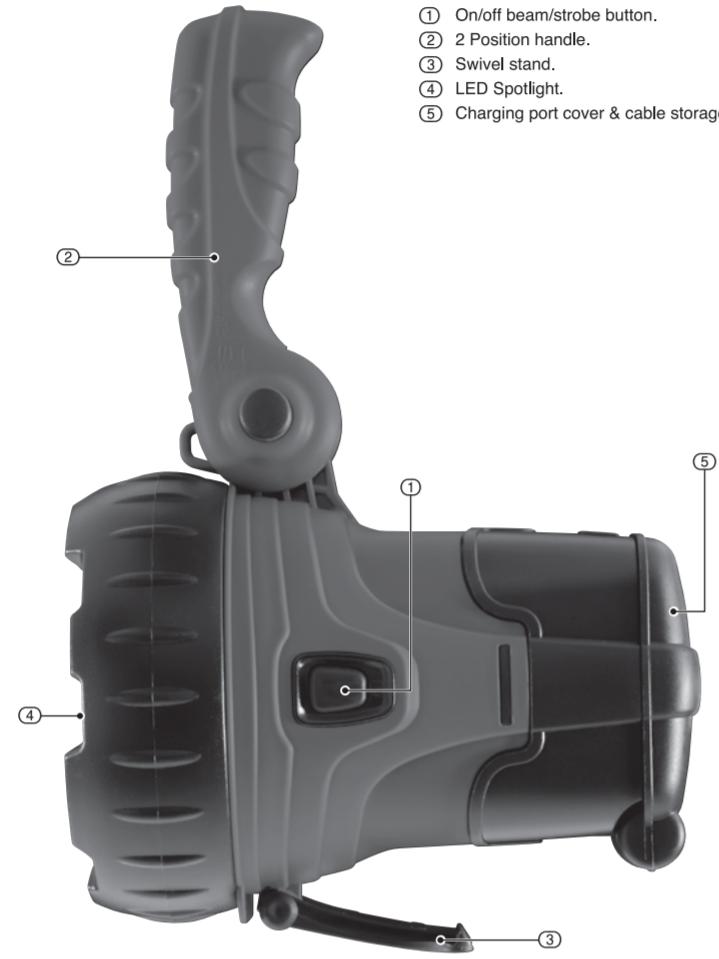

### 7. UNPACKING AND CHECKING

#### 7.1 PACKAGING


Carefully remove the spotlight from the packaging and examine it for any sign of damage that may have happened during shipping. If any part is damaged or missing, please contact the Draper Helpline (the telephone number appears on the Title page) and do not attempt to use the lamp.

**Warning!** Some of the packaging materials used may be harmful to children. Do not leave any of these materials in the reach of children.

If any of the packaging is to be thrown away, make sure they are disposed of correctly, according to local regulations.

#### 7.2 WHAT'S IN THE BOX?

As well as the spotlight; there are separate parts not fitted or attached to it.

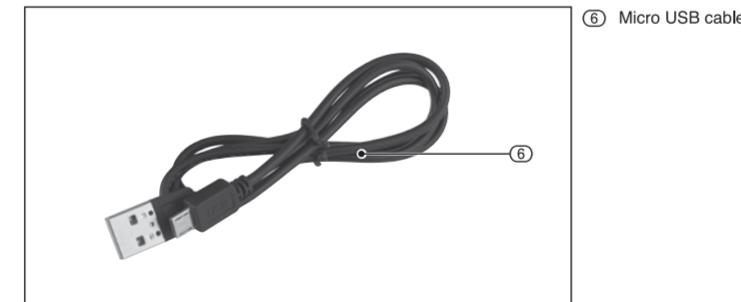

## 8. ASSEMBLING THE SPOTLIGHT

### 8.1 POWER SUPPLY

Before you connect the equipment to the power supply make sure that the data on the rating plate is identical to the supply voltage.

**Warning!** Always pull out the power plug before making adjustments to the equipment.

**Warning:** Do not connect the machine to the power supply before the product is completely assembled.

### 8.1 CHARGING

**NOTE:** The micro USB connector is tapered and will only go in one way, do not force the micro USB connector into the lamp; as it may damage the connector or short circuit the lamp, this may invalidate your guarantee.

Connect the charging micro USB cable into the charging socket, which is located under the cover at the end of the spotlight. Connect the other USB A plug to a USB output adaptor (not supplied). The red LED charging indicator will illuminate to indicate charging, and the green LED will be on when the battery is fully charged.

Disconnect the charger from the spotlight when it is fully charged.

Lithium-ion cells prefer small charges often.

Lithium-ion technology is lightweight and compact due to increased capacity in comparison to other battery chemistries.

Lithium-ion cells have no 'memory effect' and a long cycle life with outstanding discharge performance.

Lithium-ion cells suffer from a loss in capacity or thermal runaway if over charged and will degrade if allowed to enter deep discharge, however all of these situations are negated due to the complex circuitry incorporated within this product.

Charging must be carried out in an environment with an ambient air temperature between 5°C to 45°C with the transformer supplied.

To prevent overheating, do not cover the transformer.

**Attention:** If the cable is damaged or the non-self-resetting protective device is activated due to short circuit/overload the transformer shall be scrapped. A replacement of identical specification, design and application shall be obtained.

**Note:** Charging the unit with the 12V DC charger via a vehicle socket will drain the vehicle's battery unless the engine is running.



## 9. SPOTLIGHT INSTRUCTION



### 9.1 OPERATION

**CAUTION:** Never shine the LED light directly into your or any one else's eyes. To run through the sequence of modes (High, Low, Strobe and Off).


Press the on/off ① button.

### 9.2 SPOTLIGHT OPERATION

The spotlight is operated via the ON/OFF switch ①.

- ① Press once for low beam.
- ② Press twice for high beam.
- ③ Press third time for strobe.
- ④ Press forth time to switch off the spotlight.

**Warning!** Do not shine directly into any person's or animal's eyes.

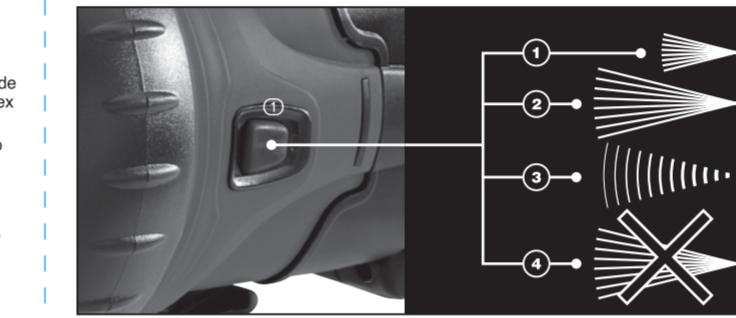


### 9.3 USB POWER TAKE OFF

Connect the USB end of the power cord into the USB output port beneath the cover, and connect the Micro USB end to your mobile device for charging.

## 10. MAINTENANCE

### 10.1 MAINTENANCE

Use only mild soap and a damp cloth to clean this spotlight. Do not submerge into liquid.

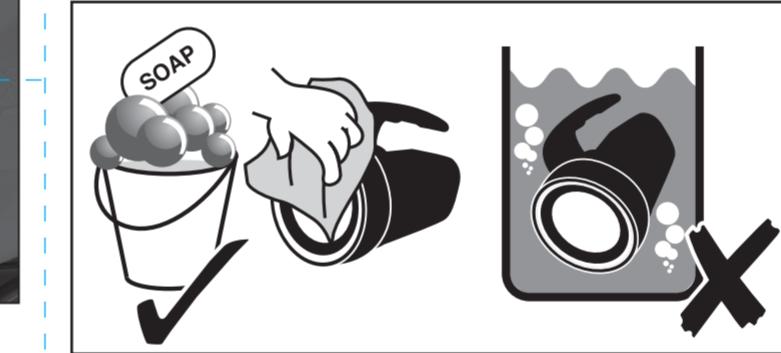

## 11. EXPLANATION OF SYMBOLS

### 11.1 EXPLANATION OF SYMBOLS

WEEE  
Do not dispose of Waste Electrical & Electronic Equipment in with domestic rubbish.

Li-ion  
Lithium-ion product.  
Refer to your local authority for advice on disposal and recycling.

For indoor use only.  
Do not expose to rain.

Do not incinerate or throw onto fire.

Warning! Read the instruction manual.

Warning! Do not aim beam at bystanders or look directly into light source.

## 12. DISPOSAL

### 12.1 DISPOSAL

At the end of the machine's working life, or when it can no longer be repaired, ensure that it is disposed of according to national regulations. Contact your local authority for details of collection schemes in your area.

In all circumstances:

- Do not dispose of power tools with domestic waste.
- Do not incinerate.
- Do not abandon in the environment.
- Do not dispose of WEEE\* as unsorted municipal waste.



### 12.2 HEALTH AND SAFETY FOR BATTERIES

**Warning!** Do not put in fire or mutilate – cells may burst or release toxic materials.

- Do not short circuit cells, may cause burns.
- The battery must be removed from the appliance before it is scrapped.
- The battery is to be disposed of safely.
- Do not incinerate – danger of explosion and release of toxic fumes.
- Do not dispose of batteries or cells in a charged condition.

Expired lithium-ion batteries must be recycled/disposed of in accordance with the appropriate regulation or legislation. They should be returned to your local warranty agent/stockist.

\* Waste Electrical & Electronic Equipment.